





Outer Dimensions Unit:mm

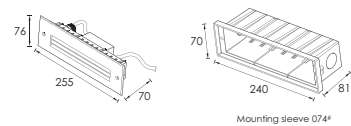


Material specifications

Housing & Front cover	12° Die-casting grey powder coated aluminum T=60-80um Adhesion of ISO class 1/ASTM class 4B
Light Window	PC T=3mm
Cable gland	IP-68 PG-9 PVC
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm² L=0.5m (low voltage) H05RN-F 3X1.0mm² L=0.5m (high voltage)
Mounting sleeve	ABS 074*
Dimmable Support	Triac PWM 1-10 Dim

Front Cover Color Option



Item	Light source	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
D18B5407	54xSMD2835	24V DC 120/240	24V = 200 120V = 95 240V = 53	24V = 4.8 120V = 6.4 240V = 6.5	Cool white =47 Warm white =44	09

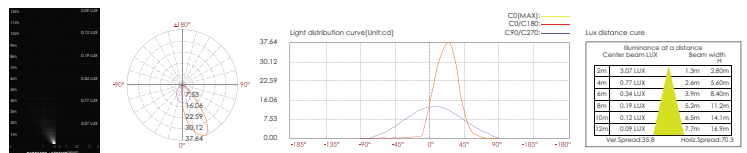


8

NEW 2016



Outer Dimensions Unit:mm




Material specifications

Housing	12° Die-casting grey powder coated aluminum T=60-80um Adhesion of ISO class 1/ASTM class 4B
Front cover	12° Die-casting aluminum
Light Window	Tempered glass T=2mm
Cable gland	IP-68 PG-9 PVC
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm² L=0.5m (low voltage) H05RN-F 3X1.0mm² L=0.5m (high voltage)
Mounting sleeve	ABS 074*
Dimmable Support	Triac PWM 1-10 Dim

Front Cover Color Option



Item	Light Source	Lens	The manufacturer selected lens degree(°)1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK Rate
B18G0257	ZX1.5W	B38	30°	24V DC 120/240	2 4 V=150 120V= 36 240V= 22	2 4 V= 3.6 120V= 3.8 240V= 3.8	Cool white=106 Warm white= 94	

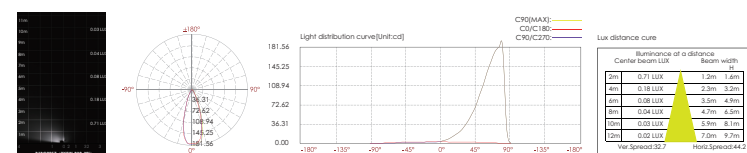

9