NEW 2016

Recessed LED Wall Light

Outer Dimensions

Unit:mm



D1FF2034 D1FA2034 Mounting sleeve 091#

Material specifications

Housing	12# Die-casting grey powder coated aluminum. T=60-80um Adhesion of ISO class 1/ASTM class 4B
Front cover	12# Die-casting aluminum **RAL7037** powder coated T=60-80μm.Adhesion of ISO class 1/ASTM class 4B;
LED	**SMD3030** type LED
Cable gland	IP-67 copper and nicked coated
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input,Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm² L=0.5m (low voltage) H05RN-F 3X1.0mm² L=0.5m (high voltage)
Mounting sleeve	ABS 091#
Dimmable Support	**Triac PWM 1-10 Dali**

Front Cover Color Option

Basic	Secondary	
Dark Grey RAL 7037	Light Sanded Grey RAL 7038	Sanded Black RAL9005

Item	Light source	Input voltage(v)	Typical operating current(mA)	Typical consumption(w)	Typical luminance(lm)	IK rate
D1FA2034	20×0.2W	24V DC 120/240	24V = 227 120V = 102 240V = 57	24V = 5.4 120V = 6.9 240V = 6.8	Cool white =103 Warm white =96.5	10





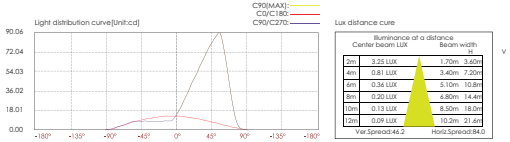

NEW 2016

Recessed LED Wall Light

Outer Dimensions

Unit:mm

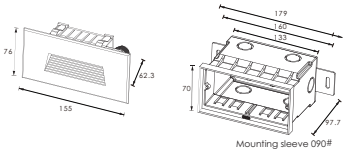

Mounting sleeve 090#

Material specifications

Housing	12# Die-casting grey powder coated aluminum. T=60-80um Adhesion of ISO class 1/ASTM class 4B
Front cover	12# Die-casting aluminum **RAL7037** powder coated T=60-80μm.Adhesion of ISO class 1/ASTM class 4B;
LED	**SMD3030** type LED
Cable gland	IP-67 copper and nicked coated
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input,Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm² L=0.5m (low voltage) H05RN-F 3X1.0mm² L=0.5m (high voltage)
Mounting sleeve	ABS 090#
Dimmable Support	**Triac PWM 1-10 Dali**

Front Cover Color Option

Basic	Secondary	
Dark Grey RAL 7037	Light Sanded Grey RAL 7038	Sanded Black RAL9005

Item	Light source	Input voltage(v)	Typical operating current(mA)	Typical consumption(w)	Typical luminance(lm)	IK rate
D1CA0734	7×0.5W	24V DC 120/240	24V = 150 120V = 72 240V = 40	24V = 3.5 120V = 4.8 240V = 4.8	Cool white =85 Warm white =77	10